

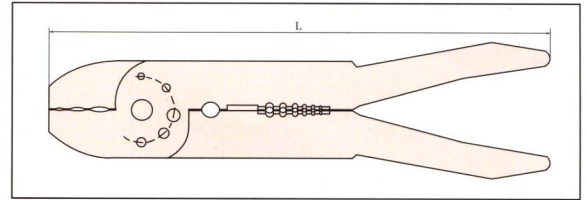


Crimping Tool, Insulated Cable Connectors

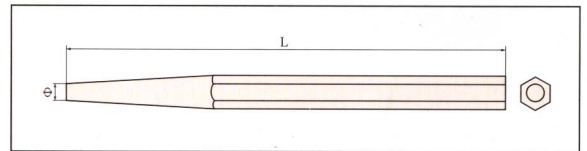


Number	L inch	L mm	Be-Cu g	Al-Cu g
306-1002	8	200	225	205

Punch Machinists'

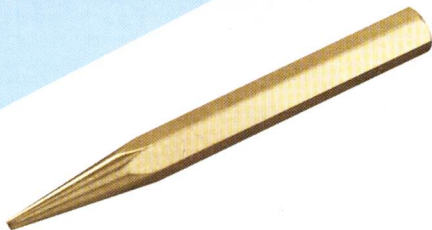

Number	Φ mm	L mm	Be-Cu g	Al-Cu g
307-1002	5	150	235	215
307-1004	8	150	285	255
307-1006	10	150	345	315

Torque Wrench

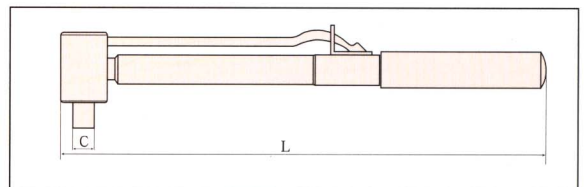

Range Of Torque Moment N.m	C inch	C mm	L mm	Be-Cu g	Al-Cu g
309	1/2	12.7	490	1340	1210

Chain Block



Number	capacity kg
308-1002	500
308-1004	1000
308-1006	2000
308-1008	3000